

# Multi-Conductor Thermoplastic - Jacketed Cable

## UL STYLE NO. 2463


UL File No. .... E50032

Standard ..... UL Subject 758

Use ..... Internal wiring of x-ray Equipment, or in the internal or external interconnection of electronic equipment.

Rating .....	STYLE No.	Volt.(max.)	Temp.(max.)
	UL STYLE No. 2463	600V	80°C

Construction: ..... Marking: **AWN 2463 80°C 600V VW-1SC #AWG E50032 TA YA**

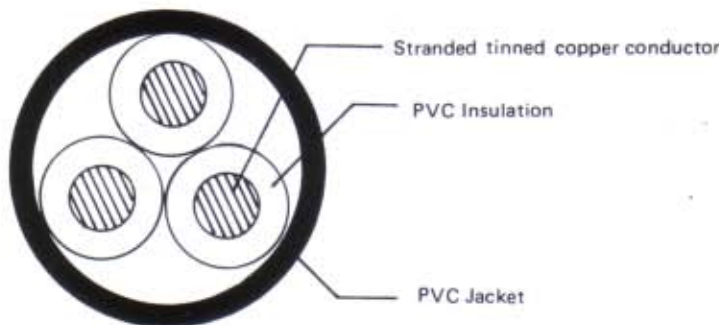

No. of cond.	Conductor			PVC Insulation		Twisting Diam (mm)	PVC Jacket		Standard Length m (ft.)
	Wire Size (AWG)	Stranding (No./mm)	Diam (mm)	Min. Avg. Thickness (mm)	Diam. (Approx.) (mm)		Min. Avg. Thickness (mm)	Overall Diam. (Approx.) (mm)	
3	24	11/0.16	0.61	0.76	2.30	4.95	0.76	6.65	305 (1000)
	22	17/0.16	0.76	0.76	2.45	5.28	0.76	7.00	
	20	21/0.18	0.95	0.76	2.65	5.70	0.76	7.40	
	18	34/0.18	1.21	0.76	2.90	6.25	0.76	8.00	
4	24	11/0.16	0.61	0.76	2.30	5.55	0.76	7.25	305 (1000)
	22	17/0.16	0.76	0.76	2.45	5.90	0.76	7.60	
	20	21/0.18	0.95	0.76	2.65	6.40	0.76	8.10	
	18	34/0.18	1.21	0.76	2.90	7.00	0.76	8.70	
5	24	11/0.16	0.61	0.76	2.30	6.20	0.76	7.90	305 (1000)
	22	17/0.16	0.76	0.76	2.45	6.60	0.76	8.30	
	20	21/0.18	0.95	0.76	2.65	7.15	0.76	8.85	
	18	34/0.18	1.21	0.76	2.90	7.83	0.76	9.55	
6	24	11/0.16	0.61	0.76	2.30	6.90	0.76	8.60	305 (1000)
	22	17/0.16	0.76	0.76	2.45	7.35	0.76	9.05	
	20	21/0.18	0.95	0.76	2.65	7.95	0.76	9.65	
	18	34/0.18	1.21	0.76	2.90	8.70	0.76	10.40	