

# Two To Seven Conductor PVC Insulated and Jacketed Cord

## UL STYLE NO. 2733


UL File No. .... E50032

Standard ..... UL Subject 758

Use ..... Internal Wiring of Electronic Fans.

Rating .....	STYLE No.	Volt.(max.)	Temp.(max.)
	UL STYLE No. 2733	600V	105°C

Construction: ..... Marking: **AWM 2733 105°C 600V VW-1SC #AWG E50032 TA YA**

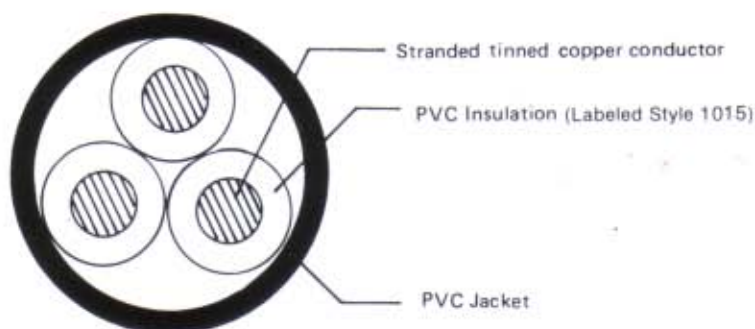

No. of Cond.	Conductor			PVC Insulation		Twisting Diam. (mm)	PVC Jacket		Standard Length m(ft.)
	Wire Size (AWG)	Stranding (No./mm)	Diam. (mm)	Min. Avg. Thickness (mm)	Diam. (Approx.) (mm)		Min. Avg. Thickness (mm)	Overall Diam. (Approx.) (mm)	
3	24	11/0.16	0.61	0.76	2.30	4.95	0.38	5.85	305(1000)
	22	17/0.16	0.76	0.76	2.45	5.28	0.38	6.20	
	20	21/0.18	0.95	0.76	2.65	5.70	0.38	6.60	
	18	34/0.18	1.21	0.76	2.90	6.25	0.38	7.15	
4	24	11/0.16	0.61	0.76	2.30	5.55	0.38	6.45	305(1000)
	22	17/0.16	0.76	0.76	2.45	5.90	0.38	6.80	
	20	21/0.18	0.95	0.76	2.65	6.40	0.38	7.30	
	18	34/0.18	1.21	0.76	2.90	7.00	0.38	7.90	
5	24	11/0.16	0.61	0.76	2.30	6.20	0.38	7.10	305(1000)
	22	17/0.16	0.76	0.76	2.45	6.60	0.38	7.50	
	20	21/0.18	0.95	0.76	2.65	7.15	0.38	8.05	
	18	34/0.18	1.21	0.76	2.90	7.83	0.38	8.75	
6	24	11/0.16	0.61	0.76	2.30	6.90	0.38	7.80	305(1000)
	22	17/0.16	0.76	0.76	2.45	7.35	0.38	8.25	
	20	21/0.18	0.95	0.76	2.65	7.95	0.38	8.85	
	18	34/0.18	1.21	0.76	2.90	8.70	0.38	9.60	

**Note:** 1. We are able to manufacture any of cable assembly from two to seven labeled style 1015 in accordance with UL requirements. When requested.