

Category 5E UTP/FTP Cable

Production Description

Rated Temperature : 75°C

Conductor : 24 awg, solid copper wire or stranded copper wires

Insulation : HDPE (CM/CMG), FRPE (CMR)


Shielded : PET & Drain wire & AL-PET (FTP Type)

Jacket : Polyvinyl chloride

Standard : UL subject 444, 1666, CSA FT4, TIA/EIA 568B.2 & ISO/IEC 11801

Application : Cable suitable for voice telecommunication service, Premises switching equipment, Data communication, Local area network and other building signaling system.

Construction :

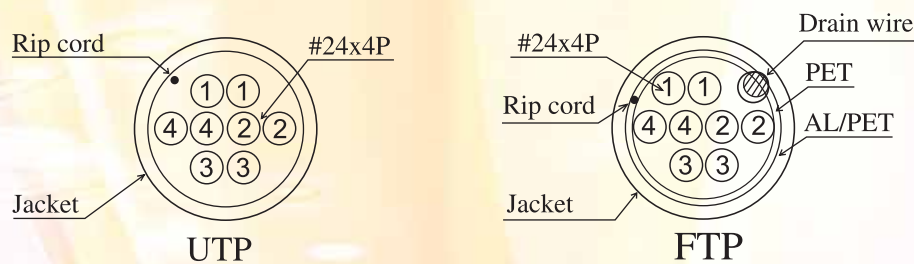

Type UL/C-UL	Pairs	Conductor		Shield & Drain wire	Jacket Nominal Diameter(mm)	Frequency
		AWG	No./mm.			
UTP CMG CM	4	24	1/0.52	—	5.50	UP TO 100MHZ & UP TO 350MHZ
		24	7/0.20		5.80	UP TO 100MHZ
UTP CMR	4	24	1/0.52	—	5.50	UP TO 100MHZ & UP TO 350MHZ
		24	7/0.20		5.80	UP TO 100MHZ
FTP CMG/CM	4	24	1/0.52	PET Drain wire AL/PET	6.00	UP TO 100MHZ
		24	7/0.20			
FTP CMR	4	24	1/0.52	PET Drain wire AL/PET	6.20	UP TO 100MHZ
		24	7/0.20			


大恒電線電纜股份有限公司
 大亞電纜集團 **TA HENG ELECTRIC WIRE & CABLE CO., LTD.**

總公司：台南縣718仁德鄉義林路149號
 電話：06-2793716 傳真：06-2793479
 台北分公司：台北縣五股工業區五工路149號7樓
 電話：02-22981511 傳真：02-22980370
 網址：www.taheng.com.tw
 E-mail：thsale@mail.taya.com.tw

HEAD OFFICE：NO.149 YI LIN RD., JEN TEH HSIANG, TAINAN HSIEN, TAIWAN
 TEL：886-6-2793716 FAX：886-6-2793479
 TAIPEI BRANCH：7F NO.149, WU KUNG RD., WU KU INDUSTRY PARK,
 WU KU HSIANG, TAIPEI HSIEN, TAIWAN
 TEL：886-2-22981511 FAX：886-2-22980370
 http://www.taheng.com.tw
 E-mail：thsale@mail.taya.com.tw