

# Category 6 UTP/FTP Cable

## Production Description

Rated Temperature : 75°C

Conductor : 24 AWG, solid copper wire

Insulation : HDPE (CM/CMG), FRPE (CMR)



Shielded : PET & Drain wire & AL-PET (FTP Type)

Jacket : Polyvinyl chloride

Standard : UL subject 444, 1666, CSA FT4, TIA/EIA 568B.2-1 & ISO/IEC 11801

Application : Cable suitable for voice telecommunication service, Premises switching equipment, Data communication, Local area network and other building signaling system.

Construction :

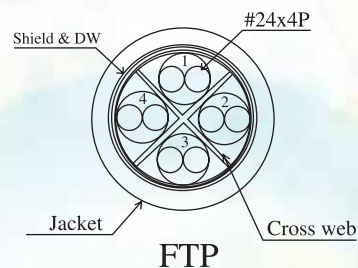

Type UL/C-UL	Paairs	Conductor		Shield & Drain wire	Jacket Nominal Diameter(mm)	Frequency
		AWG	No./mm.			
UTP CMG CM	4	24	1/0.56	—	6.20	200MHZ 250MHZ (Test Performance)
UTP CMR	4	24	1/0.56	—	6.40	
FTP CMG/CM	4	24	1/0.56	PET Drain wire AL/PET	6.80	
FTP CMR	4	24	1/0.56	PET Drain wire AL/PET	7.00	


**大恒電線電纜股份有限公司**  
 大亞電纜集團 **TA HENG ELECTRIC WIRE & CABLE CO., LTD.**

總公司：台南縣718仁德鄉義林路149號  
 電話：06-2793716 傳真：06-2793479  
 台北分公司：台北縣五股工業區五工路149號7樓  
 電話：02-22981511 傳真：02-22980370  
 網址：www.taheng.com.tw  
 E-mail：thsale@mail.taya.com.tw

HEAD OFFICE : NO.149 YI LIN RD., JEN TEH HSIANG, TAINAN HSIEN, TAIWAN  
 TEL : 886-6-2793716 FAX : 886-6-2793479  
 TAIPEI BRANCH : 7F NO.149, WU KUNG RD., WU KU INDUSTRY PARK,  
 WU KU HSIANG, TAIPEI HSIEN, TAIWAN  
 TEL : 886-2-22981511 FAX : 886-2-22980370  
 http://www.taheng.com.tw  
 E-mail : thsale@mail.taya.com.tw